


Rated load	Person	Traction Model	Rated Speed	Travel Height (max)	Clear Shaft Dimensions w x d (b3xd2)	Over Travel (h1)	Shaft Pit (d3)	Car internal w x d (b1xd1)	Door w x h (b2xh3)	Energy Consumption	Handicapped Accessibility
kg	Pers	Type	(m/s)	(m)	(mm)	(mm)	(mm)	(mm)	(mm)	kW	♿
480	6	Hydraulic	0,63	15	1600x1600	3000	1000	1150x1150	800x2000	12	—
630	8	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿

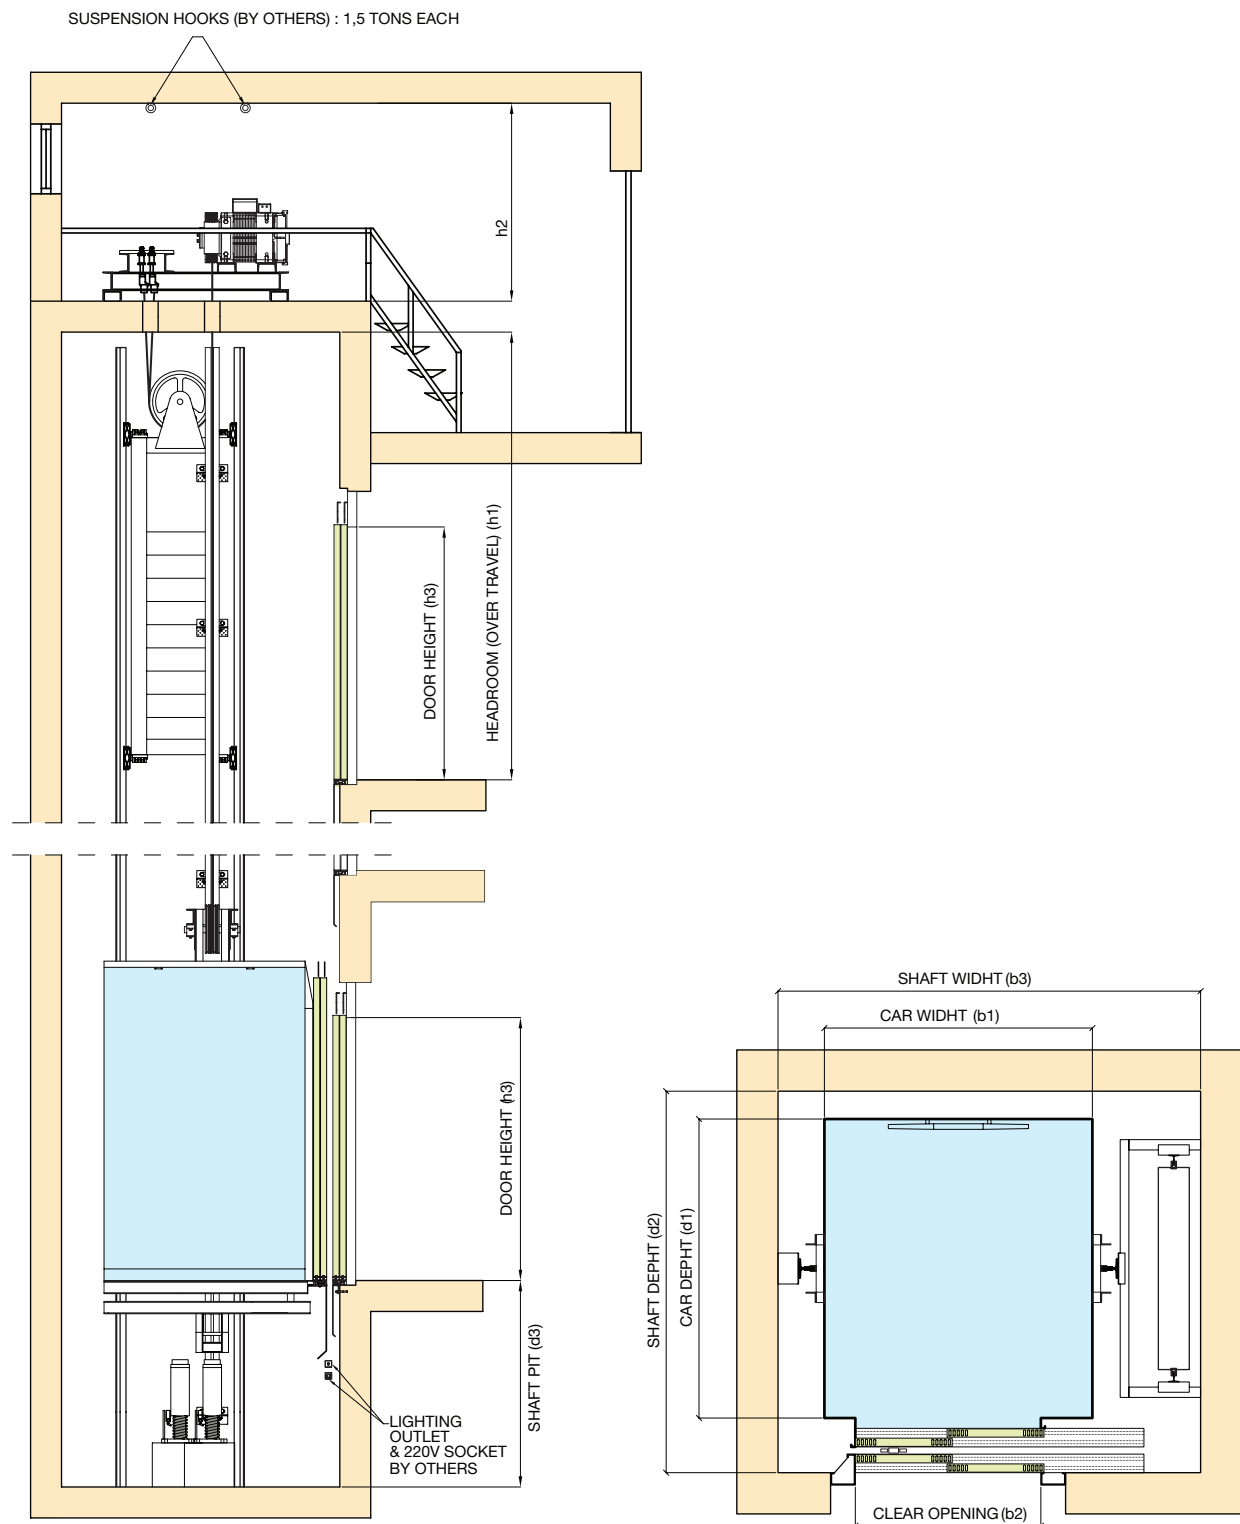

Rated load	Person	Traction Model	Rated Speed	Travel Height (max)	Clear Shaft Dimensions w x d (b3xd2)	Over Travel (h1)	Shaft Pit (d3)	Car internal w x d (b1xd1)	Door w x h (b2xh3)	Energy Consumption	Handicapped Accessibility
kg	Pers	Type	(m/s)	(m)	(mm)	(mm)	(mm)	(mm)	(mm)	kW	
400	5	MRL	1,0	45	1650x1500	3600	1100	1000x1100	700x2100	3,8	
			1,60	45	1650x1500	3600	1500	1000x1100	700x2100	6	
			2,50	148	1950x1500	5000	2000	1000x1100	700x2100	10,4	
		Classic	1,0	45	1650x1500	3700	1400	1000x1100	700x2100	3,8	
1,60	45		1650x1500	4200	1600	1000x1100	700x2100	6			
480	6	Hydraulic	0,63	15	1600x1600	3000	1000	1150x1150	800x2000	12	
			1,0	45	1750x1600	3600	1100	1100x1250	800x2100	3,8	
			1,60	45	1750x1600	3600	1500	1100x1250	800x2100	6	
		MRL	2,50	148	2050x1600	5000	2000	1100x1250	800x2100	10,4	
			1,0	45	1750x1600	3700	1400	1100x1250	800x2100	3,8	
			1,60	45	1750x1600	4200	1600	1100x1250	800x2100	6	
630	8	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿
			1,0	45	1800x1800	3600	1100	1100x1400	900x2100	5	♿
			1,60	45	1800x1800	3600	1500	1100x1400	900x2100	8,2	♿
		MRL	2,50	148	1800x1800	5000	2000	1100x1400	900x2100	13,2	♿
			1,0	58	1600x1900	3700	1400	1100x1400	800x2100	4,9	♿
			1,60	103	1600x1900	4200	1600	1100x1400	800x2100	9,1	♿
800	10	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿
			1,0	45	1800x1800	3600	1100	1100x1400	900x2100	5	♿
			1,60	45	1800x1800	3600	1500	1100x1400	900x2100	8,2	♿
		MRL	2,50	148	1800x1800	5000	2000	1100x1400	900x2100	13,2	♿
			1,0	58	1600x1900	3700	1400	1100x1400	800x2100	4,9	♿
			1,60	103	1600x1900	4200	1600	1100x1400	800x2100	9,1	♿
1000	13	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿
			1,0	45	1800x1800	3600	1100	1100x1400	900x2100	5	♿
			1,60	45	1800x1800	3600	1500	1100x1400	900x2100	8,2	♿
		MRL	2,50	148	1800x1800	5000	2000	1100x1400	900x2100	13,2	♿
			1,0	58	1600x1900	3700	1400	1100x1400	800x2100	4,9	♿
			1,60	103	1600x1900	4200	1600	1100x1400	800x2100	9,1	♿
1275	17	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿
			1,0	45	1800x1800	3600	1100	1100x1400	900x2100	5	♿
			1,60	45	1800x1800	3600	1500	1100x1400	900x2100	8,2	♿
		MRL	2,50	148	1800x1800	5000	2000	1100x1400	900x2100	13,2	♿
			1,0	58	1600x1900	3700	1400	1100x1400	800x2100	4,9	♿
			1,60	103	1600x1900	4200	1600	1100x1400	800x2100	9,1	♿
1600	21	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿
			1,0	45	1800x1800	3600	1100	1100x1400	900x2100	5	♿
			1,60	45	1800x1800	3600	1500	1100x1400	900x2100	8,2	♿
		MRL	2,50	148	1800x1800	5000	2000	1100x1400	900x2100	13,2	♿
			1,0	58	1600x1900	3700	1400	1100x1400	800x2100	4,9	♿
			1,60	103	1600x1900	4200	1600	1100x1400	800x2100	9,1	♿
1800	24	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿
			1,0	45	1800x1800	3600	1100	1100x1400	900x2100	5	♿
			1,60	45	1800x1800	3600	1500	1100x1400	900x2100	8,2	♿
		MRL	2,50	148	1800x1800	5000	2000	1100x1400	900x2100	13,2	♿
			1,0	58	1600x1900	3700	1400	1100x1400	800x2100	4,9	♿
			1,60	103	1600x1900	4200	1600	1100x1400	800x2100	9,1	♿
2000	26	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿
			1,0	45	1800x1800	3600	1100	1100x1400	900x2100	5	♿
			1,60	45	1800x1800	3600	1500	1100x1400	900x2100	8,2	♿
		MRL	2,50	148	1800x1800	5000	2000	1100x1400	900x2100	13,2	♿
			1,0	58	1600x1900	3700	1400	1100x1400	800x2100	4,9	♿
			1,60	103	1600x1900	4200	1600	1100x1400	800x2100	9,1	♿

Remarks,

- Shaft dimensions width & depth are based on clear dimension with +/- 25 mm horizontal tolerances over the total travel height.
- Any additional information please contact info@emakautolift.com with technical department.
- Fire resistant landing doors are optional and may require different layout drawings.
- All configurations are according to ISO 4190 (TS 8237).