




CLASS I Lift designed for the transport of person.

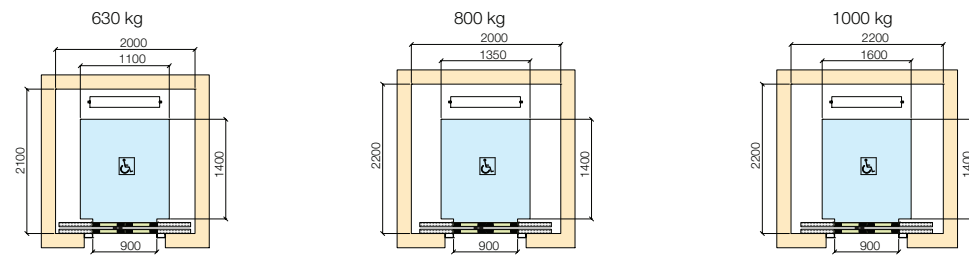


CLASS II Lift designed mainly for the transport of persons but in which goods may be carried.

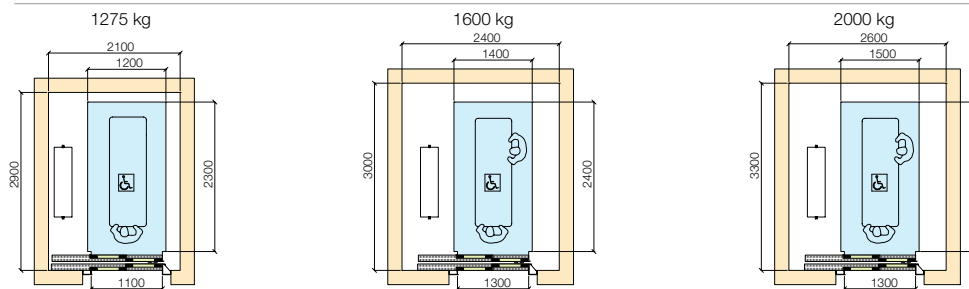



CLASS III Lift designed health-care purposes, including hospitals and nursing homes.

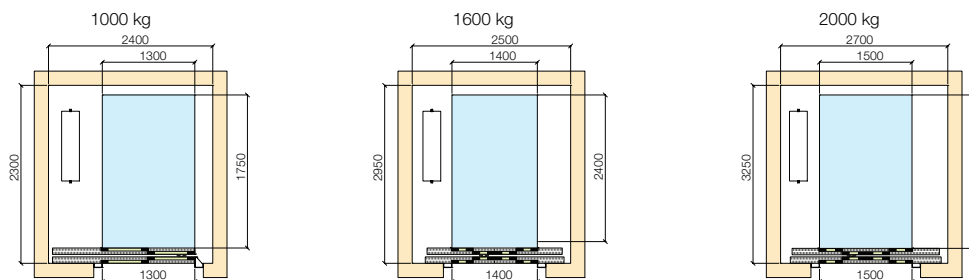


CLASS IV Lift designed mainly for the transport of goods (freight) which are generally accompanied by persons.

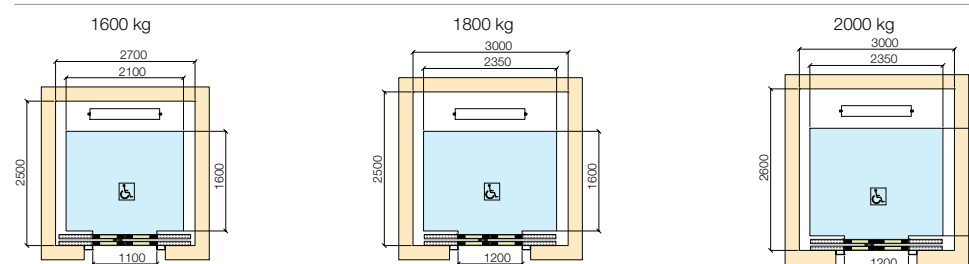

CLASS VI Lift especially designed to suit buildings with intensive traffic.

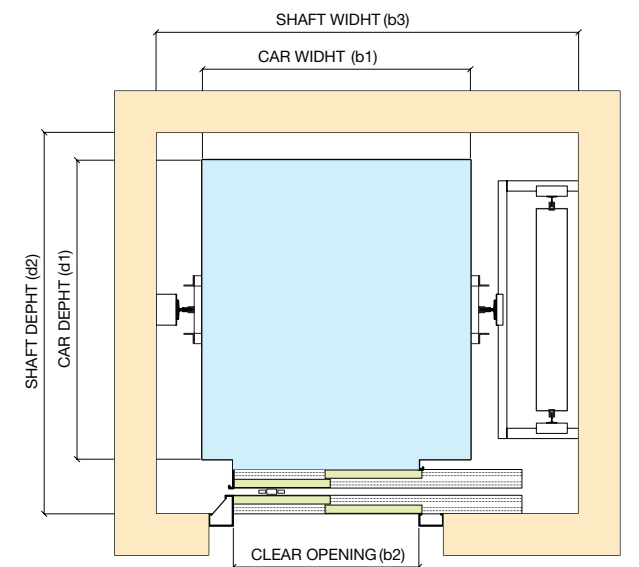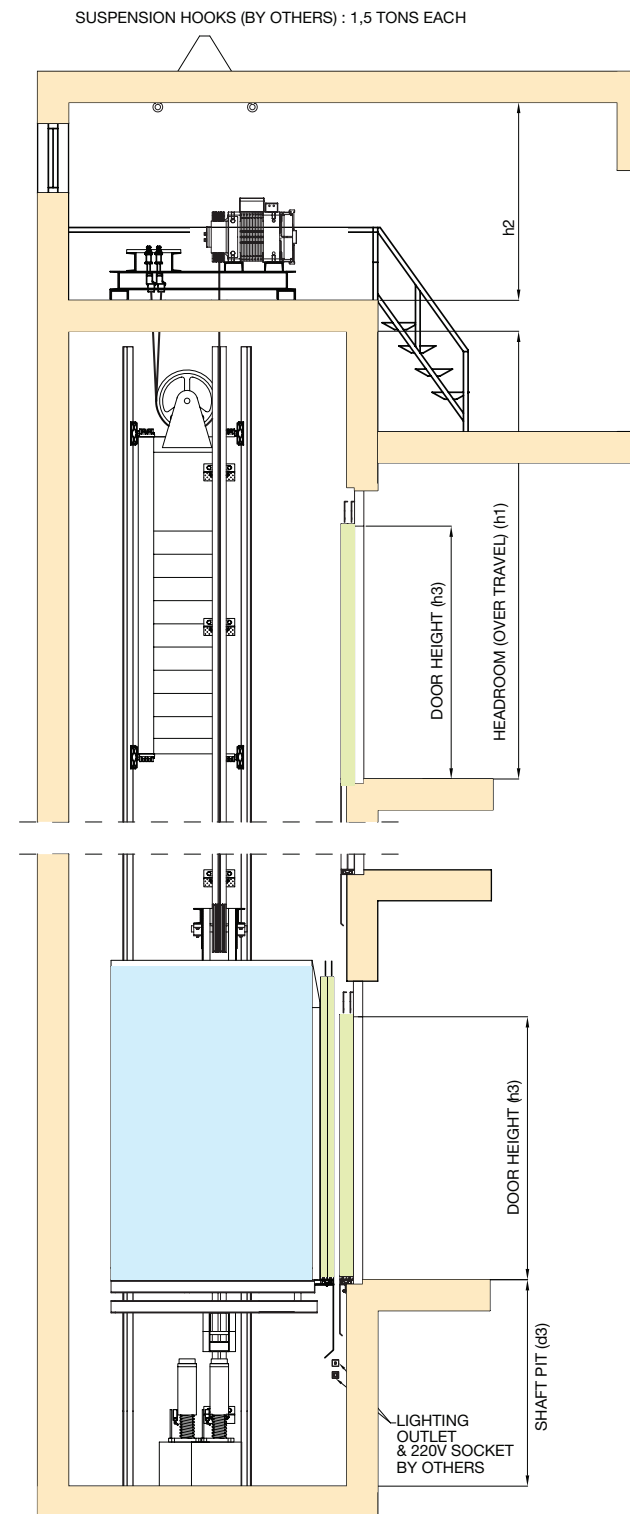

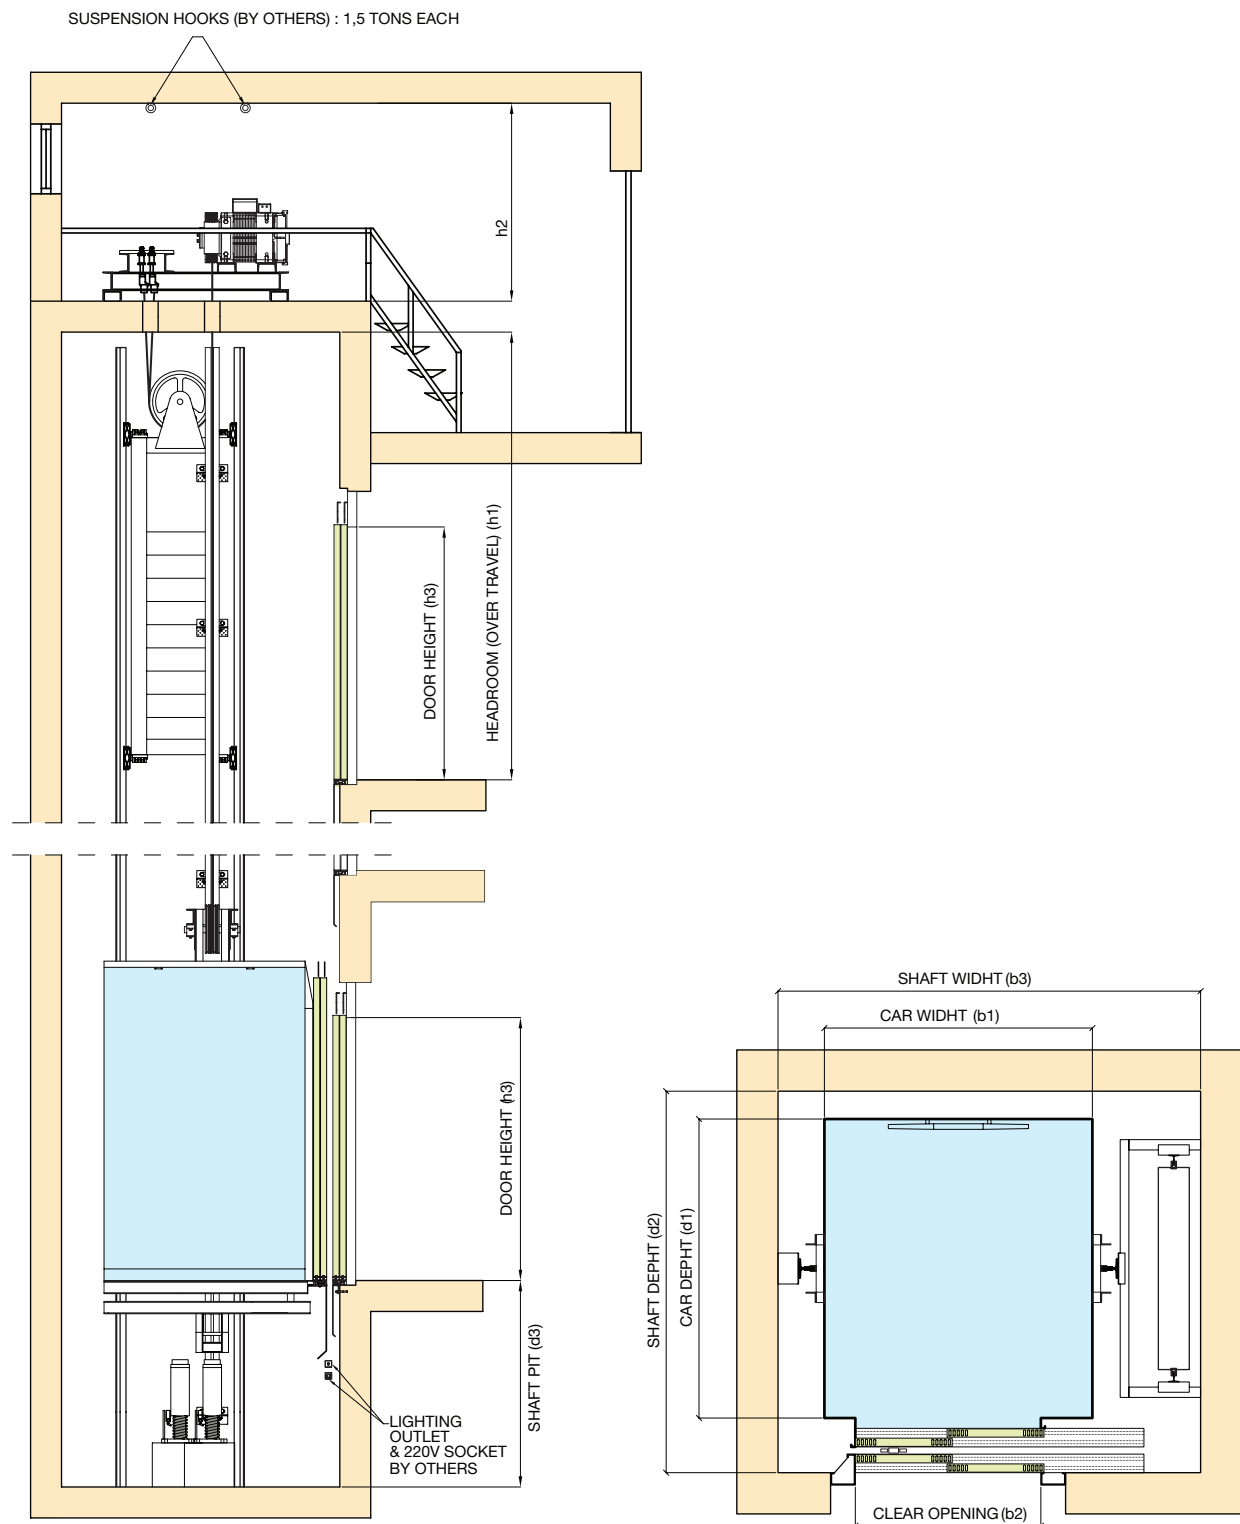

Rated load	Person	Traction Model	Rated Speed	Travel Height (max)	Clear Shaft Dimensions w x d (b3xd2)	Over Travel (h1)	Shaft Pit (d3)	Car internal w x d (b1xd1)	Door w x h (b2xh3)	Energy Consumption	Handicapped Accessibility
kg	Pers	Type	(m/s)	(m)	(mm)	(mm)	(mm)	(mm)	(mm)	kW	
400	5	MRL	1,0	45	1650x1500	3600	1100	1000x1100	700x2100	3,8	
			1,60	45	1650x1500	3600	1500	1000x1100	700x2100	6	
			2,50	148	1950x1500	5000	2000	1000x1100	700x2100	10,4	
		Classic	1,0	45	1650x1500	3700	1400	1000x1100	700x2100	3,8	
			1,60	45	1650x1500	4200	1600	1000x1100	700x2100	6	
			2,50	148	1950x1500	5000	2000	1000x1100	700x2100	10,4	
480	6	Hydraulic	0,63	15	1600x1600	3000	1000	1150x1150	800x2000	12	
			1,0	45	1750x1600	3600	1100	1100x1250	800x2100	3,8	
			1,60	45	1750x1600	3600	1500	1100x1250	800x2100	6	
		MRL	2,50	148	2050x1600	5000	2000	1100x1250	800x2100	10,4	
			1,0	45	1750x1600	3700	1400	1100x1250	800x2100	3,8	
			1,60	45	1750x1600	4200	1600	1100x1250	800x2100	6	
630	8	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿
			1,0	45	1800x1800	3600	1100	1100x1400	900x2100	5	♿
			1,60	45	1800x1800	3600	1500	1100x1400	900x2100	8,2	♿
		MRL	2,50	148	1800x1800	5000	2000	1100x1400	900x2100	13,2	♿
			1,0	58	1600x1900	3700	1400	1100x1400	800x2100	4,9	♿
			1,60	103	1600x1900	4200	1600	1100x1400	800x2100	9,1	♿
800	10	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿
			1,0	45	1800x1800	3600	1100	1100x1400	900x2100	5	♿
			1,60	45	1800x1800	3600	1500	1100x1400	900x2100	8,2	♿
		MRL	2,50	148	1800x1800	5000	2000	1100x1400	900x2100	13,2	♿
			1,0	58	1600x1900	3700	1400	1100x1400	800x2100	4,9	♿
			1,60	103	1600x1900	4200	1600	1100x1400	800x2100	9,1	♿
1000	13	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿
			1,0	45	1800x1800	3600	1100	1100x1400	900x2100	5	♿
			1,60	45	1800x1800	3600	1500	1100x1400	900x2100	8,2	♿
		MRL	2,50	148	1800x1800	5000	2000	1100x1400	900x2100	13,2	♿
			1,0	58	1600x1900	3700	1400	1100x1400	800x2100	4,9	♿
			1,60	103	1600x1900	4200	1600	1100x1400	800x2100	9,1	♿
1275	17	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿
			1,0	45	1800x1800	3600	1100	1100x1400	900x2100	5	♿
			1,60	45	1800x1800	3600	1500	1100x1400	900x2100	8,2	♿
		MRL	2,50	148	1800x1800	5000	2000	1100x1400	900x2100	13,2	♿
			1,0	58	1600x1900	3700	1400	1100x1400	800x2100	4,9	♿
			1,60	103	1600x1900	4200	1600	1100x1400	800x2100	9,1	♿
1600	21	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿
			1,0	45	1800x1800	3600	1100	1100x1400	900x2100	5	♿
			1,60	45	1800x1800	3600	1500	1100x1400	900x2100	8,2	♿
		MRL	2,50	148	1800x1800	5000	2000	1100x1400	900x2100	13,2	♿
			1,0	58	1600x1900	3700	1400	1100x1400	800x2100	4,9	♿
			1,60	103	1600x1900	4200	1600	1100x1400	800x2100	9,1	♿
1800	24	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿
			1,0	45	1800x1800	3600	1100	1100x1400	900x2100	5	♿
			1,60	45	1800x1800	3600	1500	1100x1400	900x2100	8,2	♿
		MRL	2,50	148	1800x1800	5000	2000	1100x1400	900x2100	13,2	♿
			1,0	58	1600x1900	3700	1400	1100x1400	800x2100	4,9	♿
			1,60	103	1600x1900	4200	1600	1100x1400	800x2100	9,1	♿
2000	26	Hydraulic	0,63	15	1500x1850	3000	1000	1100x1400	800x2000	15	♿
			1,0	45	1800x1800	3600	1100	1100x1400	900x2100	5	♿
			1,60	45	1800x1800	3600	1500	1100x1400	900x2100	8,2	♿
		MRL	2,50	148	1800x1800	5000	2000	1100x1400	900x2100	13,2	♿
			1,0	58	1600x1900	3700	1400	1100x1400	800x2100	4,9	♿
			1,60	103	1600x1900	4200	1600	1100x1400	800x2100	9,1	♿

Remarks,

- Shaft dimensions width & depth are based on clear dimension with +/- 25 mm horizontal tolerances over the total travel height.
- Any additional information please contact info@emakautolift.com with technical department.
- Fire resistant landing doors are optional and may require different layout drawings.
- All configurations are according to ISO 4190 (TS 8237).